

EXCEL®


Van Beest has recently finished development of a new type of thrust bearing swivel system for the EXCEL® Swivel sling hook with clevis, grade 8. This hook is now equipped with needle roller thrust bearings that support rotation under load.

Please find herewith the latest Van Beest product information including details of these hooks. For more information please contact us: sales@vanbeest.com



CSECA

Improved design

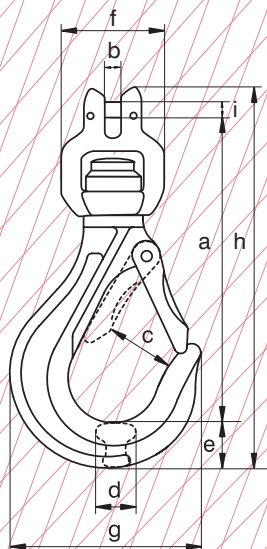

EXCEL® Swivel sling hook with clevis EN1677-2, grade 8

- Material** : alloy steel, grade 8, quenched and tempered
Safety factor : MBL equals 4 x WLL
Standard : EN 1677-2
Finish : painted yellow (J) or red (R)
Certification : at no extra charge this product can be supplied with a works certificate, a 3.1 material certificate and/or a EC Declaration of Conformity
Note : equipped with needle roller thrust bearing

for chain diameter		WLL	length	width	width opening	thick-ness	width	width out-side	width out-side	length	dia-meter pin	weight each
mm	inch	t	a	b	c	d	e	f	g	h	i	kg
5	3/16	0.8	126	7	26	15	20	56	72	159	6	0.44
6	7/32	1.12	125	7	26	15	20	56	72	159	8	0.44
7-8	1/4-5/16	2	153	9	30	20	24	65	87	194	9	0.99
10	3/8	3.2	188	12	33	24	29	79	106	240	13	1.55
13	1/2	5.4	224	15	37	32	39	96	133	294	16	2.78
16	5/8	8.2	270	19	43	40	44	121	165	350	20	6.61

Now available from stock!!

VAN BEEST B.V. Manufacturer and Supplier of wire rope- and chain fittings. Reg. trade marks 'Green Pin' and 'Excel'



PO. Box 57
 3360 AB Sliedrecht
 The Netherlands
 Industrieweg 6
 3361 HJ Sliedrecht
 Telephone +31 184 41 33 00
 Telefax +31 184 41 49 59
 E-mail sales@vanbeest.com
 Internet www.vanbeest.com

